
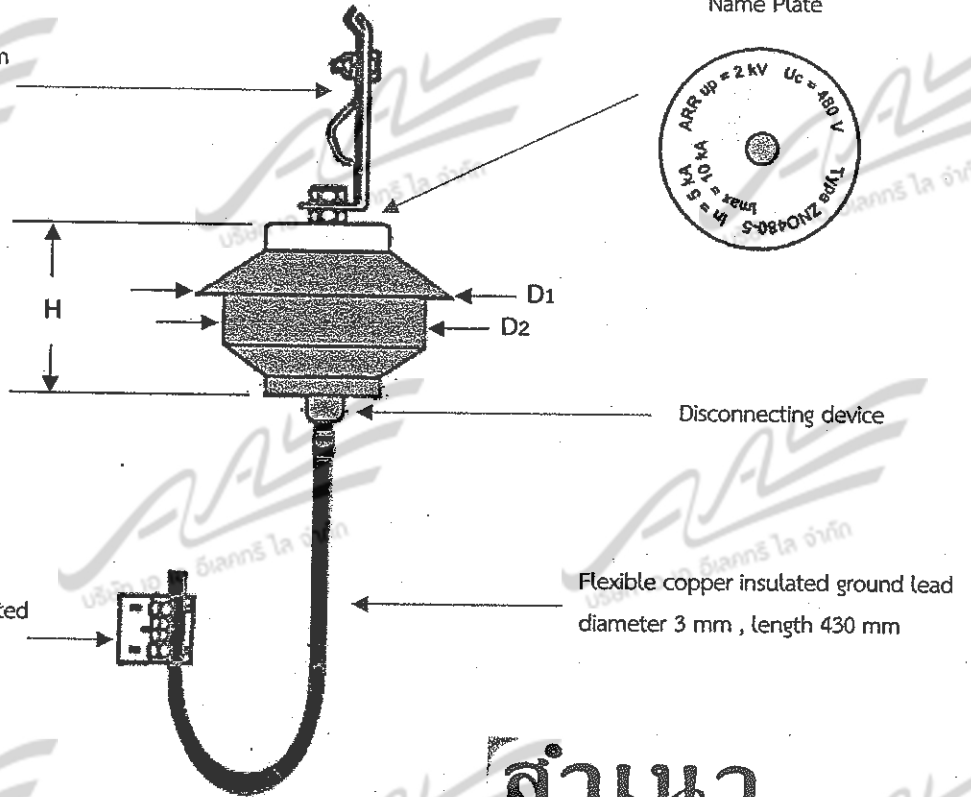


1040000300 ล้อฟ้า 250-500 โวลท์ 2.5-5.0 กิโลแอมป์

ต้นฉบับ

Line Suspension clamp for aluminium conductor diameter of 5.9-12.9 mm (size 25-120 mm²)

Name Plate




สำเนา

Specification of LV Surge Arrester 250-500V , 5-10kA

Product Type	Overall Dimension in mm		
	H	D1	D2
LV Surge Arrester 250-500V , 5-10kA	35	60	47.5

Label of Product

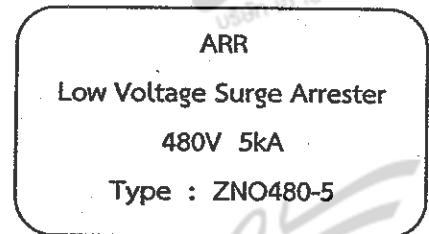

Characteristics of LV Surge Arrester According to IEC 61643-1

Rate Voltage (Ur) / Rated Frequency	: 480 V , r.m.s. / 50 Hz	Dielectric withstand test , 1 min	: 3.3 kV , r.m.s.
Maximum continuous operating voltage (Uc)	: 480 V , r.m.s.	Measured limiting voltage	: 2 kV , peak
Norminal discharge current (In) , 8/20 μs waveshape	: 5 kA , peak	Approximate , Tolerance ±5%	
Maximum discharge current (Imax) , 8/20 μs waveshape	: 10 kA , peak		
Short circuit withstand capability test (Ip)	: 10 kA , r.m.s.		

PEA Material No.	1040000300			
PEA Specification No.	RPRO-035/2551			
PEA Drawing No.				
Rev.0	Jan 21 2016	Scale	Dimension	Sheet
		NTS	mm	1/1
Revision		Material	Metal Oxide , etc.	
		Drawing No.	1040000300-04-S-01-01	

Draft by

A A ELECTRI LI CO., LTD
 95 Moo 5 Lumpo Bangbuatong
 Nonthaburi Thailand , 11110
 02 - 158 - 4576 - 7
 www.aal2008.com

Approve

Surge Arrester 250-500 V 2.5-5.0 kA

ล้อฟ้า 250-500 โวลท์ 2.5-5.0 กิโลแอมป์